


Technical Specification

Product Format :

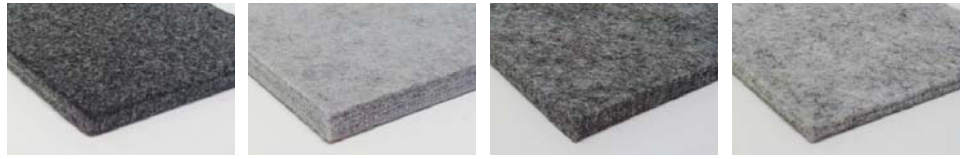

Product Code	FDX 75	FDX 40	FDX 32	FDX 28
Traffic Class	Heavy / Double Glue Installation	Heavy	Heavy	Heavy
Weight	950 gms/m ²	1,356 gms/m ²	1,085 gms/m ²	950 gms/m ²
Thickness	5-6 mm +/-	10 mm +/-	8 mm +/-	5-6 mm +/-
Width	200 cm	200 cm	200 cm	200 cm
Roll Length	25 meters	16 meters	20 meters	25 meters

BS 5808 : 1991 Test results- British Standard for Carpet Underlays

Tensile strength (BS 2567)	>400 N
Loss in thickness after static loading (BS 4939)	< 20 %
Loss in thickness after dynamic loading (BS 4052)	< 15 %
Retention of work of Compression (BS 4098)	> 80 %
Resistance to cracking (BS 5808)	Pass

Flammability

Methenamine Pill Test ASTM-D 2859	Pass
Critical Radiant Flux ASTM-E 648	Meets or exceeds Class 1 (as specified in NFPA Life Safety Code)
Hot Metal Nut (BS 4790)	Low radius of ignition
- Volatile Organic Compound : ASTM D 5116-06	Meet Singapore Green Label Standard
- Recycled Content (100% Synthetic Fiber)	> 85 %

Note : Specification and fiber color are subject to normal manufacturing tolerance and subject to changes without prior notice

Special Features:

- 100% synthetic fibers
- Use environmentally friendly recycled and recyclable materials
- Odorless
- Clean and smooth surfaces
- Dust-free
- High density for exceptional carpet support
- Does not develop bacteria or mildew
- Easy installation
- Designed for double glue installation system
- Excellent flammability ratings



039-009
ENVIRONMENTALLY
FRIENDLY CARPET